

NO BOLT

No Bolt Operations Pty Ltd
ACN 083 088 884
ABN 87 086 624 171

18 Tarnard Drive, Braeside VIC 3195
PO Box 353, Braeside VIC 3195

HIRE & SALES

Phone Toll Free 1800 331 478

T: 03 9587 9595

F: 03 9587 7595

E: info@nobolt.com.au

W: www.nobolt.com.au



6' x 4' x 12'

8' x 4' x 12'

10' x 4' x 12'


Aluminium Mobile Scaffold Tower

SPECIFICATIONS: Aluminium wall thickness 4.7mm. Grade of alloy 6061T6.
D.L.I. Classification MEDIUM DUTY Vic - D.L.I. approval Vic, NSW, Qld, NT, SA, WA. Approval No. SA143.
SAFETY POINTS ON REVERSE - READ CAREFULLY

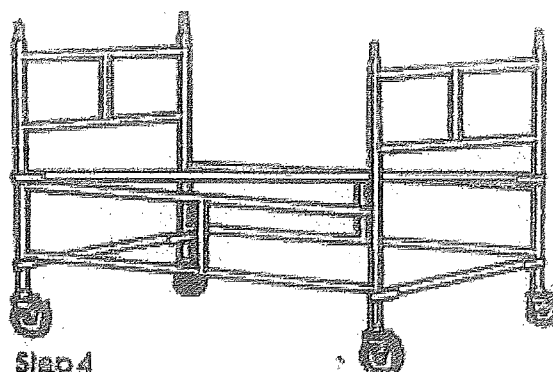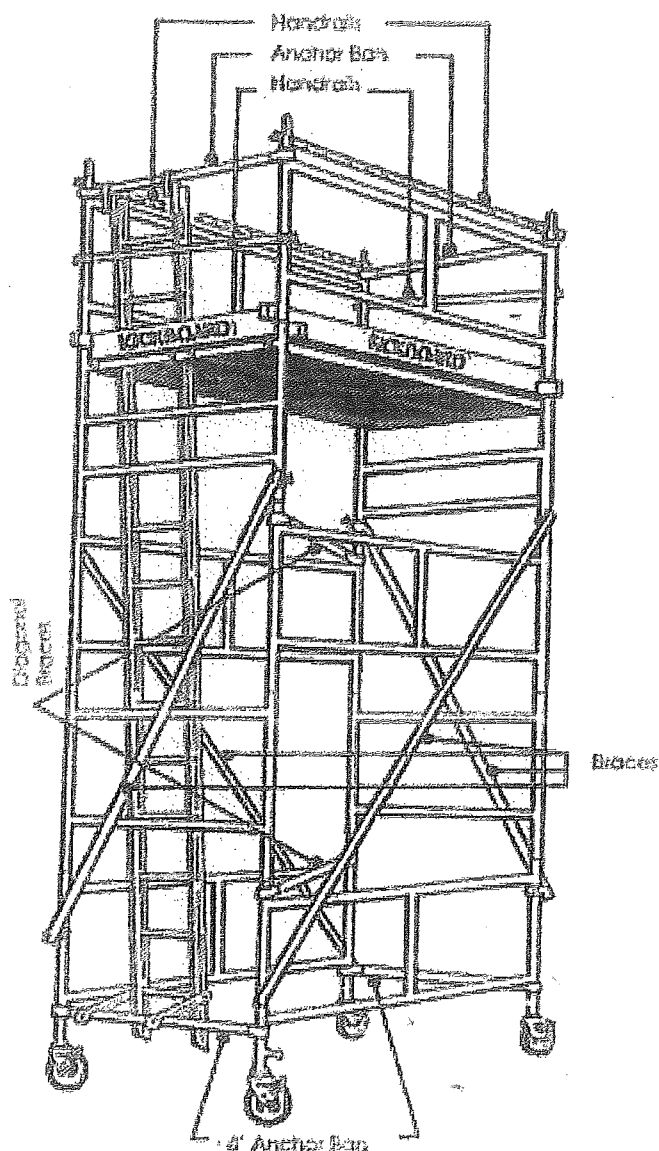


Step 4

Add alternative pairs of frames
Add 4 casters/wheels

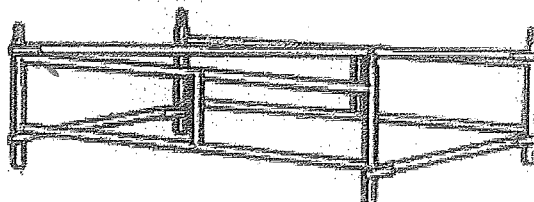

Step 3

Diagonal brace is then slid
over uprights

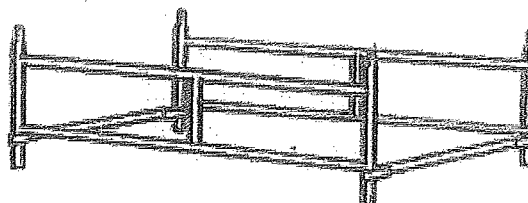

Step 2 (Long Frames)

Two frames of equal length
placed in ends of anchor bars.



Step 1 (Short Anchor Bars)

Place 2 anchor bars of equal
length parallel to each other.

OPTIONS

- Half height frames
- Outriggers and Ties
- Choice of different Casters
- Adjustable base plates
- Aluminium Grid Mesh decking
or Non-Skid Ply decking